



## SIMU-Hz RADIO TRANSMITTERS

1 CHANNEL



THE NEW COLLECTION OF WIRELESS TRANSMITTERS TO EASILY CONTROL  
A ROLLER SHUTTER, AN AWNING OR LIGHTING

**A transmitter for every use:** choose either a wall version that can be placed where you want or a remote version that's always within easy reach!



**The remote control:** compact, ergonomic and practical, it fits easily in the hand and can also be hung up on the wall thanks to its magnetic bracket.

**Elegant, both understated and modern,** this new transmitter easily blends into any kind of decor. A collection of frames with stylish colours and decorations lets you to customise the transmitters and bring a unique touch to your decor. You'll find this signature in the entire collection of simu-hz transmitters.

**A touch of comfort:** record a favourite position on your roller shutter or awning and activate it by simply pressing the stop button.

**simu-hz**  
technology

## PROGRAMMING AND ASSEMBLY

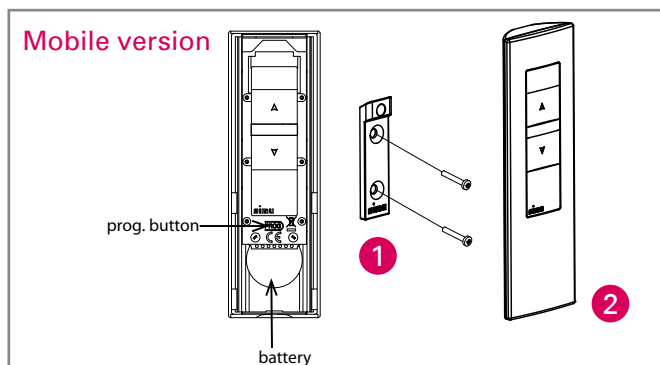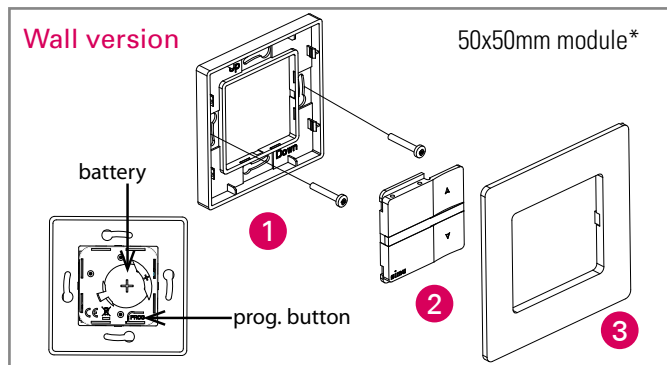

1 Mount the bracket on the wall

2 Clip on the Hz control module


3 Clip on the frame

1 Mount the bracket on the wall

2 Put the Hz remote control in its wall bracket

\* Module compatible with 50x50 mm electrical frames on the market, thanks to the "DIN accessories" offer (ask us for more details).

## TECHNICAL CHARACTERISTICS

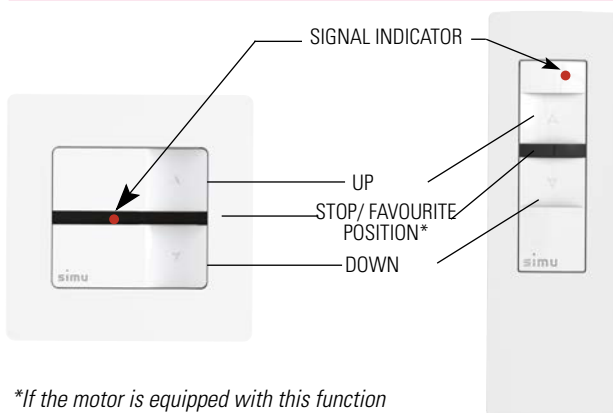

\*If the motor is equipped with this function

**POWER SUPPLY** 3V CR2430 battery

**RADIO RANGE** **Wall version:** 150 meters in open field and 15 meters through 2 reinforced concrete walls

**Mobile version:** 200 meters in open field and 20 meters through 2 reinforced concrete walls

**SIZE** **Wall version:** 80x80x10 mm

**Mobile version:** 125x40x15 mm

**OPERATING TEMPERATURE** -10° to +60°C

**RADIO FREQUENCY** 433.42 MHz

**PROTECTION INDEX** IP30

**PRODUCT CLASS** III

**COMPATIBILITY** SIMU-Hz motors and receivers



## REFERENCES

| DESCRIPTION      | REFERENCES          |
|------------------|---------------------|
| WALL 1 CHANNEL   | x1 <b>2008369</b>   |
|                  | x10 <b>2008370</b>  |
|                  | x100 <b>2008495</b> |
| MOBILE 1 CHANNEL | x1 <b>2008799</b>   |

### Transmitters to custom (delivered without the frame):

| DESCRIPTION                | REFERENCES          |
|----------------------------|---------------------|
| WALL 1 CHANNEL TO CUSTOM   | x100 <b>2009070</b> |
| MOBILE 1 CHANNEL TO CUSTOM | x120 <b>2008816</b> |

Delivered with battery. Mobile version supplied with wall bracket (wall fixing screws not included in both cases).

## COLLECTION OF COLOURED FRAMES TO CUSTOMIZE THE TRANSMITTER

|                              | Anthracite | Taupe   | Raspberry Red | Mineral Blue | Brushed Alu | Zebrano Wood | Lily flower | Zebra   | Anthracite chrome |
|------------------------------|------------|---------|---------------|--------------|-------------|--------------|-------------|---------|-------------------|
| Frames for wall transmitters | 9019766    | 9019767 | 9019768       | 9019769      | 9019770     | 9019771      | 9019772     | 9019773 | 9019774           |
| Frames for remote controls   | 9019775    | 9019776 | 9019777       | 9019778      | 9019779     | 9019780      | 9019781     | 9019782 | 9019783           |

The frames are packaged individually

