

# T6 Hz.02 MOTOR

## RADIO ELECTRONIC, Ø 60 MM

MOTOR WITH BUILT-IN SIMU-HZ RADIO RECEIVER


ELECTRONIC END-LIMIT SYSTEM

REMOTE SETTING OF THE UP AND DOWN END-LIMITS


...from a SIMU-Hz transmitter (excepted a sequential Hz transmitter).

INTERMEDIATE POSITION FUNCTION

...it is possible to record a user's favorite position.



### DIMENSIONS

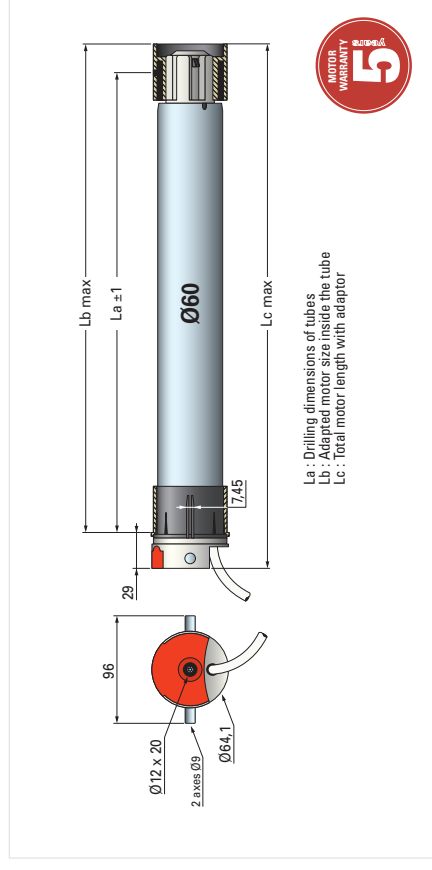

### RANGE

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	La	Lb	Lc	WEIGHT	REFERENCE
<b>T6 Hz.02 - 60/12</b>	60 Nm	12 rpm	240 W	1,05 A	716 mm	729 mm	758 mm	4,7 kg	<b>2006372</b>
<b>T6 Hz.02 - 80/12</b>	80 Nm	12 rpm	290 W	1,25 A	716 mm	729 mm	758 mm	5 kg	<b>2006373</b>
<b>T6 Hz.02 - 100/12</b>	100 Nm	12 rpm	350 W	1,5 A	716 mm	729 mm	758 mm	5,3 kg	<b>2006374</b>
<b>T6 Hz.02 - 120/12</b>	120 Nm	12 rpm	400 W	1,8 A	716 mm	729 mm	758 mm	5,5 kg	<b>2006375</b>

*Other references are available on page 176*

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	La	Lb	Lc	WEIGHT	REFERENCE
<b>T6 Hz.02 - 60/14</b>	60 Nm	14 rpm	285 W	2,5 A	716 mm	729 mm	758 mm	5 kg	<b>2006060</b>
<b>T6 Hz.02 - 80/14</b>	80 Nm	14 rpm	390 W	3,4 A	716 mm	729 mm	758 mm	5,4 kg	<b>2006061</b>
<b>T6 Hz.02 - 100/14</b>	100 Nm	14 rpm	430 W	3,8 A	716 mm	729 mm	758 mm	5,6 kg	<b>2006062</b>

*Other references are available on page 176*

### SPECIFICATION

- POWER SUPPLY** 230 Volts - 50 Hz or 120 Volts - 60 Hz (US range)
- THERMAL CUT-OUT** 4 minutes (230V) or 5 minutes (120V)
- END-LIMIT** Electronic system with operating limited to 3 min.
- PROTECTION INDEX** IP 44
- AMBIENT TEMPERATURE OF USE** from -10°C to +40°C and exceptionally from -20°C to +60°C
- POWER CABLE 230V** 2.5 meters (3x0.75 mm<sup>2</sup> wires, white H05 VVF)
- POWER CABLE 120V** 2.5 meters (3xAWG19 wires, white 05 VVF)
- RADIO FREQUENCY** 433.42 MHz
- SECURE COMMUNICATION** Encrypted control orders  
+ Rolling code with 16 million possible combinations  
-200m in free field
- RANGE** and ~20m through 2 reinforced concrete walls (depends on the environment and on the radio pollution)
- BASE DIAMETER OF THE CROWN** 29 mm
- MOTOR HEAD THICKNESS** 29 mm
- 4 CYCLES PER DAY** non consecutive
- INSULATION CLASS** Class I motor
- CERTIFICATION**
- & STANDARD**