





THE REFERENCE MODEL

T5 MOTOR - 12 rpm

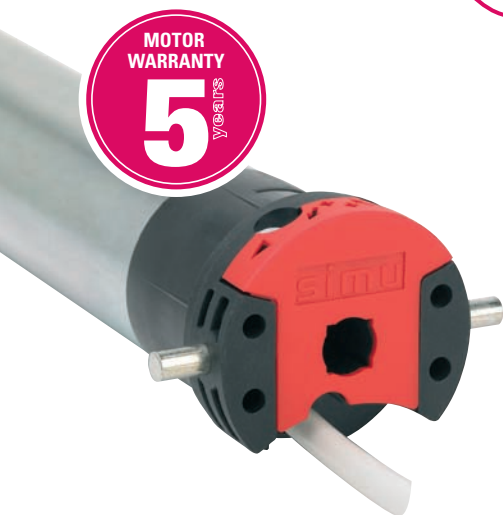

- The T5 motor offers a complete range of torques and speeds for driving the majority of roller shutters and selecting the closest matched motor for each application.
- The T5 motor head is fitted with a multidirectional cable outlet which simplifies positioning the power cable.
- Using a Hz receiver, the T5 can be fitted with the SIMU-Hz wireless technology.
- Progressive end-limit system
- Setting of the UP and DOWN end-limits on the motor head

DIMENSIONS

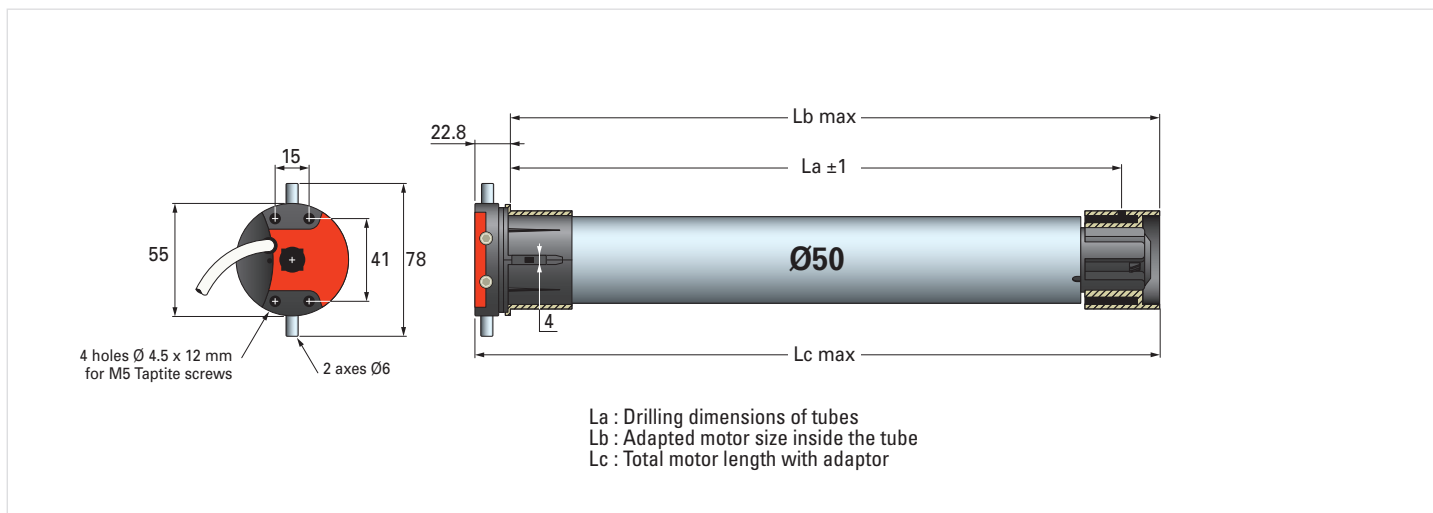



RANGE

POWER SUPPLY 230V - 50 Hz, CABLE 2.5 METERS

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	La	Lb	Lc
motor T5 - 6/12	6 Nm	12 rpm	90 W	0,40 A	485 mm	498 mm	521 mm
motor T5 - 10/12	10 Nm	12 rpm	100 W	0,45 A	485 mm	498 mm	521 mm
motor T5 - 15/12	15 Nm	12 rpm	120 W	0,50 A	485 mm	498 mm	521 mm
motor T5 - 20/12	20 Nm	12 rpm	140 W	0,65 A	505 mm	518 mm	541 mm
motor T5 - 30/12	30 Nm	12 rpm	160 W	0,75 A	585 mm	598 mm	621 mm
motor T5 - 40/12	40 Nm	12 rpm	240 W	1,10 A	585 mm	598 mm	621 mm
motor T5 - 50/12	50 Nm	12 rpm	240 W	1,10 A	585 mm	598 mm	621 mm

SPECIFICATION

POWER SUPPLY	230 Volts - 50 Hz
THERMAL CUT-OUT	4 minutes (230V)
PROGRESSIVE END-LIMIT	with a capacity of 28 rounds
PROTECTION INDEX	IP 44
AMBIENT TEMPERATURE OF USE	from -10°C to +40°C and exceptionally from -20°C to +60°C
POWER CABLE 230 V	2.5 meters (4x0,75 mm ² wires, white H05 VVF)
BASE DIAMETER OF THE CROWN	for Ø50 x 1.5 mm round tube
MOTOR HEAD THICKNESS	22.8 mm
4 CYCLES PER DAY	non consecutive
INSULATION CLASS	Class I motor
CERTIFICATION	 
& STANDARD	