

T5 AUTO SHORT MOTOR

SHORT WIRED ELECTRONIC, Ø 50 MM



AUTOMATIC SETTING OF THE UP AND DOWN END-LIMITS

... the roller shutter must be equipped with up and down stoppers.

MOTOR SUITABLE FOR SHORT WIDTH ROLLER SHUTTERS

... thanks to its length of only 387mm, including the adaptor.

STOP ON OBSTACLE FUNCTION

... the motor stops when closing in the case of an obstruction.

FROST DETECTION FUNCTION

... the motor stops when opening if the shutter curtain is stuck in the guide rails by frost or if the bottom latch is locked.

PERMANENT READJUSTMENT OF END-LIMITS

... because of the constant auto-learning and revision of the up and down end-limit positions. It adapts thus to the variations in length of the shutter curtain over time.


RANGE

POWER SUPPLY 230V - 50 Hz


DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	La	Lb	Lc	WEIGHT	REFERENCE
T5 AUTO Short	6 Nm	17 rpm	90 W	0.4 A	351 mm	364 mm	387 mm	1.63 kg	2006742

Other references are available on page 174


DIMENSIONS

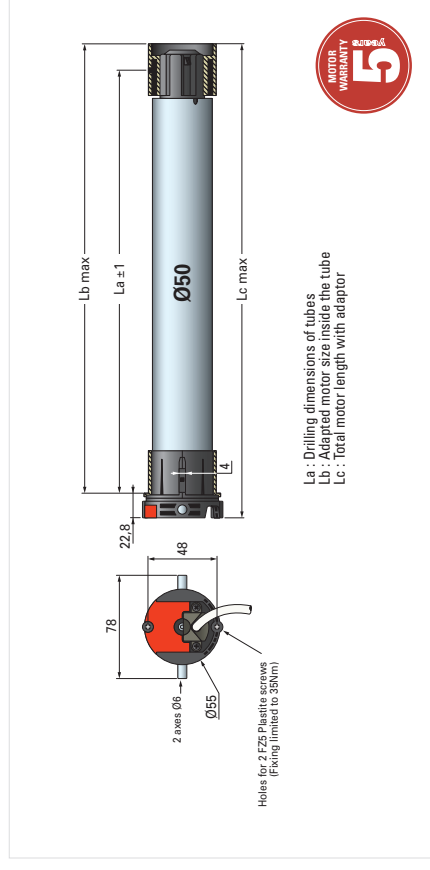

DEPORTED ELECTRONIC PLATE



REQUIRED EQUIPMENT



Locks
page 82 to 86



Conical stoppers
page 163
or stoppers integrated
into the guide rails

SPECIFICATION

POWER SUPPLY 230 Volts - 50 Hz

THERMAL CUT-OUT 4 minutes

END-LIMIT Electronic system integrated in the deported plate with operating limited to 3min. The readjustment is automatic and permanent.

PROTECTION INDEX IP 44

AMBIENT TEMPERATURE OF USE from -10°C to +40°C and exceptionally from -20°C to +60°C



POWER CABLE 3 meters (4x0,75 mm² wires, white H05 VVF)

BASE DIAMETER OF THE CROWN for Ø50 x 1.5 mm round tube

MOTOR HEAD THICKNESS 22.8 mm

4 CYCLES PER DAY non consecutive

INSULATION CLASS Class I motor

CERTIFICATION  

& STANDARD 