

DMI6 MOTOR

WIRED, Ø 60 MM

BUILT-IN MANUAL OVERRIDE
 PROGRESSIVE END-LIMIT SYSTEM
 UP AND DOWN END-LIMIT SETTING ON THE MOTOR HEAD (ON EITHER SIDES OF THE HEAD).
 COMPACT MOTOR HEAD (ONLY 24 MM THICKNESS).



HOMOLOGATIONS & STANDARD    

POWER SUPPLY 230V - 50 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
DMI 6 - 40/17	40 Nm	17 rpm	240 W	1,05 A	4,6 kg
DMI 6 - 55/17	55 Nm	17 rpm	290 W	1,25 A	4,85 kg
DMI 6 - 70/17	70 Nm	17 rpm	350 W	1,5 A	5,17 kg
DMI 6 - 85/17	85 Nm	17 rpm	450 W	1,8 A	5,38 kg
DMI 6 - 60/12	60 Nm	12 rpm	240 W	1,05 A	4,63 kg
DMI 6 - 80/12	80 Nm	12 rpm	290 W	1,25 A	4,85 kg
DMI 6 - 100/12	100 Nm	12 rpm	350 W	1,5 A	5,17 kg
DMI 6 - 120/12	120 Nm	12 rpm	400 W	1,8 A	5,38 kg

POWER SUPPLY 120V - 60 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
DMI 6 - 60/14	60 Nm	14 rpm	285 W	2,5 A	4,87 kg
DMI 6 - 80/14	80 Nm	14 rpm	390 W	3,4 A	5,18 kg
DMI 6 - 100/14	100 Nm	14 rpm	430 W	3,8 A	5,54 kg



Tubular motors 230 VAC are available with an integrated radio receiver to operate them with wireless transmitters. Contact us.




Catalogue is available on the website

www.simu.com



Realisation SIMU 01/14 - SIMU SAS, capital 5 000 000 euros, RCS Vesoul 425 650 090. This document is not legally binding. We reserve ourselves the right to make any useful modification in order to constantly develop and improve our tender. SIMU shall not be held responsible for misuse by non-professionals.

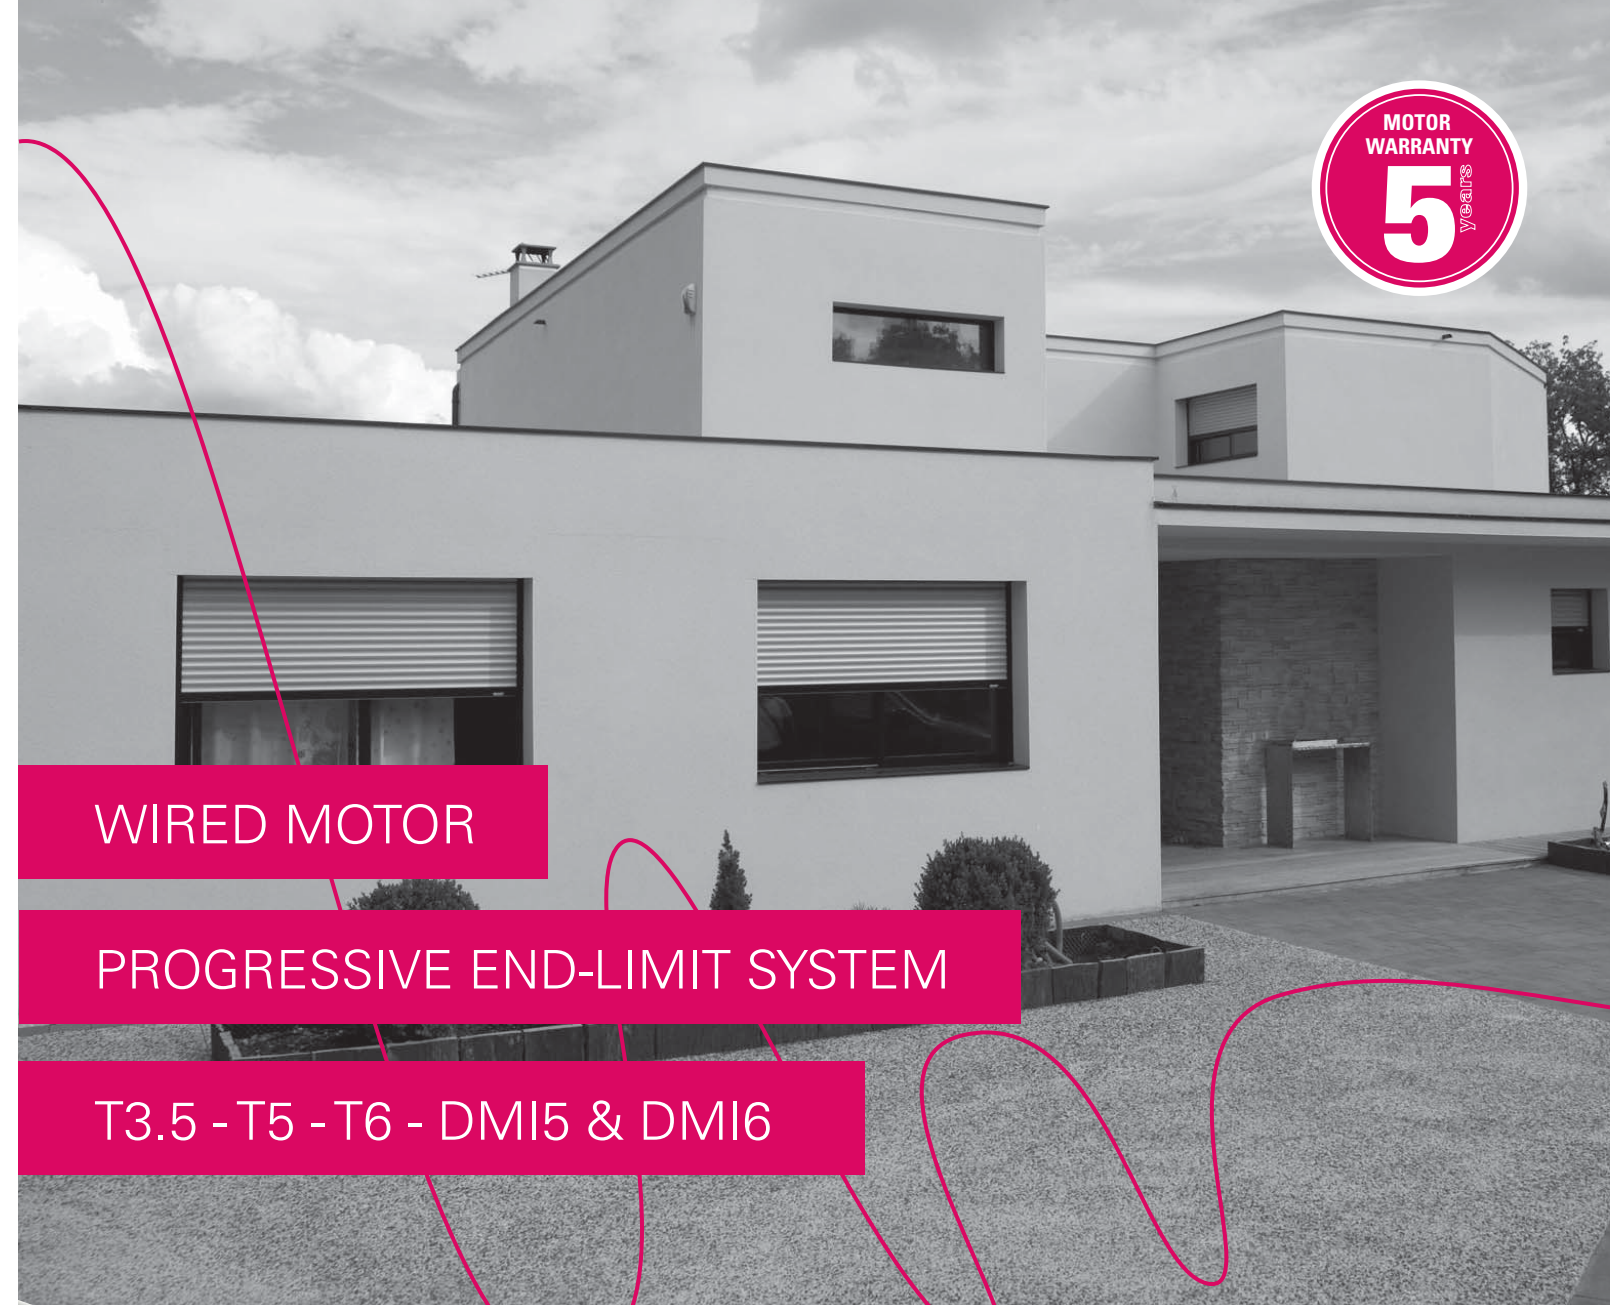

WIRED MOTOR

PROGRESSIVE END-LIMIT SYSTEM

T3.5 - T5 - T6 - DMI5 & DMI6



A COMPLETE RANGE FOR ROLLER SHUTTERS, BLINDS AND AWNINGS!

- **SIMU offers a complete range** of Ø40, 50 and 60 mm motors, with torques from 3 to 120Nm which give the opportunity to motorize all roller shutters and awnings, the smallest such as the largest. Moreover, they can be adapted to all tubes of the market thanks to a wide range of adaptor sets.
- **The quality and accuracy above all:** 100% of SIMU motors are electrically controlled during their manufacture. An integrated temperature sensor protects the motor and cut its power supply in case of overheating. The progressive end-limit system is accurate and allows fine adjustment of up and down stops of the roller shutter.
- **Available with a manual override:** DMI5 and DMI6 motors are equipped with a manual override to open and close the shutter or the awning with a crank handle in case of power failure.



T3.5 MOTOR

WIRED, Ø 40 MM

PROGRESSIVE END-LIMIT SYSTEM
UP AND DOWN END-LIMIT SETTING ON THE MOTOR HEAD



HOMOLOGATIONS   
& STANDARD 

POWER SUPPLY 230V - 50 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T3,5 - 3/25	3 Nm	25 rpm	90 W	0,4 A	1,12 kg
T3,5 - 4/12	4 Nm	12 rpm	75 W	0,35 A	1,02 kg
T3,5 - 6/12	6 Nm	12 rpm	90 W	0,4 A	1,11 kg
T3,5 - 9/12	9 Nm	12 rpm	105 W	0,5 A	1,22 kg
T3,5 - 13/8	13 Nm	8 rpm	100 W	0,5 A	1,25 kg


POWER SUPPLY 120V - 60 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T3,5 - 4/30	4 Nm	30 rpm	100 W	0,95 A	1,07 kg
T3,5 - 6/14	6 Nm	14 rpm	105 W	0,95 A	1,16 kg
T3,5 - 9/14	9 Nm	14 rpm	135 W	1,2 A	1,2 kg

T6 MOTOR

WIRED, Ø 60 MM

PROGRESSIVE END-LIMIT SYSTEM
UP AND DOWN END-LIMIT SETTING ON THE MOTOR HEAD

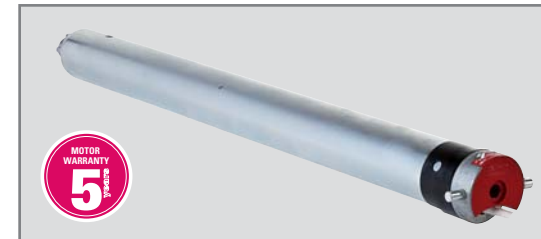

HOMOLOGATIONS   
& STANDARD 

POWER SUPPLY 230V - 50 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T6 - 40/17	40 Nm	17 rpm	240 W	1,05 A	4,43 kg
T6 - 55/17	55 Nm	17 rpm	290 W	1,25 A	4,64 kg
T6 - 70/17	70 Nm	17 rpm	350 W	1,5 A	4,97 kg
T6 - 85/17	85 Nm	17 rpm	450 W	1,8 A	5,17 kg
T6 - 60/12	60 Nm	12 rpm	240 W	1,05 A	4,43 kg
T6 - 80/12	80 Nm	12 rpm	290 W	1,25 A	4,64 kg
T6 - 100/12	100 Nm	12 rpm	350 W	1,5 A	4,97 kg
T6 - 120/12	120 Nm	12 rpm	400 W	1,8 A	5,17 kg

POWER SUPPLY 120V - 60 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T6 - 60/14	60 Nm	14 rpm	285 W	2,5 A	4,66 kg
T6 - 80/14	80 Nm	14 rpm	390 W	3,4 A	4,97 kg
T6 - 100/14	100 Nm	14 rpm	430 W	3,8 A	5,31 kg

T5 MOTOR

WIRED, Ø 50 MM

PROGRESSIVE END-LIMIT SYSTEM
UP AND DOWN END-LIMIT SETTING ON THE MOTOR HEAD



HOMOLOGATIONS   
& STANDARD 

POWER SUPPLY 230V - 50 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T5 - 8/17	8 Nm	17 rpm	100 W	0,45 A	1,75 kg
T5 - 10/17	10 Nm	17 rpm	120 W	0,5 A	1,78 kg
T5 - 15/17	15 Nm	17 rpm	140 W	0,65 A	1,93 kg
T5 - 20/17	20 Nm	17 rpm	160 W	0,75 A	2,2 kg
T5 - 25/17	25 Nm	17 rpm	170 W	0,8 A	2,3 kg
T5 - 30/17	30 Nm	17 rpm	240 W	1,1 A	2,47 kg
T5 - 35/17	35 Nm	17 rpm	240 W	1,1 A	2,47 kg
T5 - 40/12	40 Nm	12 rpm	240 W	1,1 A	2,5 kg
T5 - 50/12	50 Nm	12 rpm	240 W	1,1 A	2,55 kg

POWER SUPPLY 120V - 60 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
T5 - 10/12	10 Nm	12 rpm	80 W	0,7 A	2,04 kg
T5 - 15/18	15 Nm	18 rpm	145 W	1,1 A	2,25 kg
T5 - 20/12	20 Nm	12 rpm	130 W	1,1 A	2,28 kg
T5 - 25/18	25 Nm	18 rpm	180 W	1,6 A	2,28 kg
T5 - 30/12	30 Nm	12 rpm	170 W	1,5 A	2,5 kg
T5 - 35/18	35 Nm	18 rpm	250 W	2,1 A	2,77 kg
T5 - 40/12	40 Nm	12 rpm	210 W	1,8 A	2,76 kg
T5 - 50/12	50 Nm	12 rpm	250 W	2,1 A	2,48 kg

DMI5 MOTOR

WIRED, Ø 50 MM

BUILT-IN MANUAL OVERRIDE
PROGRESSIVE END-LIMIT SYSTEM
UP AND DOWN END-LIMIT SETTING ON THE MOTOR HEAD (ON EITHER SIDES OF THE HEAD)
COMPACT MOTOR HEAD (ONLY 24 MM THICKNESS)



HOMOLOGATIONS    
& STANDARD 

POWER SUPPLY 230V - 50 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
DMI 5 - 8/17	8 Nm	17 rpm	100 W	0,45 A	2,51 kg
DMI 5 - 10/17	10 Nm	17 rpm	120 W	0,5 A	2,59 kg
DMI 5 - 15/17	15 Nm	17 rpm	140 W	0,65 A	2,71 kg
DMI 5 - 20/17	20 Nm	17 rpm	160 W	0,75 A	2,84 kg
DMI 5 - 25/17	25 Nm	17 rpm	170 W	0,8 A	3 kg
DMI 5 - 30/17	30 Nm	17 rpm	240 W	1,1 A	3,1 kg
DMI 5 - 35/17	35 Nm	17 rpm	240 W	1,1 A	3,12 kg
DMI 5 - 40/12	40 Nm	12 rpm	240 W	1,1 A	3,12 kg
DMI 5 - 50/12	50 Nm	12 rpm	240 W	1,1 A	3,14 kg

POWER SUPPLY 120V - 60 Hz

DESCRIPTION	TORQUE	SPEED	POWER	CURRENT	WEIGHT
DMI 5 - 10/12	10 Nm	12 rpm	80 W	0,8 A	2,59 kg
DMI 5 - 15/18	15 Nm	18 rpm	145 W	1,3 A	2,77 kg
DMI 5 - 20/12	20 Nm	12 rpm	130 W	1,1 A	2,8 kg
DMI 5 - 25/18	25 Nm	18 rpm	180 W	1,6 A	3,07 kg
DMI 5 - 30/12	30 Nm	12 rpm	170 W	1,5 A	53,01 kg
DMI 5 - 35/18	35 Nm	18 rpm	250 W	2,1 A	3,28 kg
DMI 5 - 40/12	40 Nm	12 rpm	210 W	1,8 A	3,28 kg
DMI 5 - 50/12	50 Nm	12 rpm	250 W	2,1 A	3,3 kg