

PROGRAMMING
ASSISTANCE
WEBSITE

WWW.TIMER-MULTI.COM

PROGRAMMABLE REMOTE CONTROL

TIMER MULTI



THE HOUSE IN THE AGE OF AUTOMATION!

- **Creation of customised scenarios:** TIMER Multi can register up to 6 programs per day. Each of these programs can control one or several of the six channels of the remote control. Every day the programs can be different.
- **Energy saving:** thanks to the twilight function, the shutters can automatically close at the sunset time, to better insulate the house from the outside cold in winter.
- **More security:** when you are away, the house will appear lived-in thanks to the presence simulation function. When activated, this function randomly opens and closes shutters from 0 to +30 minutes.
- **Simplified programming:** the copy / paste function allow to quickly duplicate the programmings, when they are the same for several days of the week.
- **Customizable screen:** The LCD screen enables to record a name for each channel (5 letters + 1 digit, from 1 to 6).
- **Flexible use:** TIMER Multi can easily be switched off at any time and used only as a manual centralised system.

OPERATING PRINCIPLE

AUTOMATIC MODE:
The movement of shutters is controlled by the built-in clock

current time

execution day of the next program

next program

time of the next order

Channels that will be commanded by the next program

next order:
opening / closing / intermediate position

Example on screen:
Every Thursday, the roller shutters controlled by channels 3,5 and 6 opens at 8h16.

Press 1 second on the VALIDATION key to navigate between modes

MANUAL MODE:
The movement of shutters is managed manually from the remote control

Selected channel number

Selected channel name


selection keys

up

stop

down

TECHNICAL CHARACTERISTICS

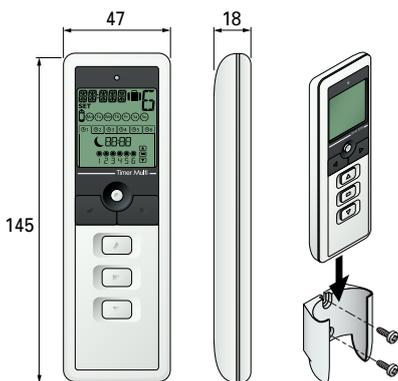

PRODUCT CLASS	class III
POWER	2x1.5V batteries - LR03 AAA type
OPERATING TEMPERATURE	from +0°C to +45°C
PROTECTION INDEX	IP 20
RANGE	~ 200 m in free field ~ 20 m through 2 reinforced concrete walls (it depends of the environment and of the pollution)
RADIO FREQUENCY	433.42 MHz
COMPATIBILITY	Hz Motors and external Hz receivers
CERTIFICATION	CE

REFERENCES

DESCRIPTION	COLOUR	REFERENCES
TIMER MULTI	white	2007830

Comes with batteries and wall support (screws not supplied).