



SIMU-Hz RADIO TRANSMITTERS

5 CHANNELS

THE NEW COLLECTION OF WIRELESS TRANSMITTERS FOR CENTRALISED CONTROL OF SEVERAL ROLLER SHUTTERS.

One transmitter manages several roller shutters: control up to 5 roller shutters or groups of roller shutters from the same transmitter, you can also organise zones and centralisation in your house.

Clever: the pre-programmed «ALL» channel centralises the 5 recorded channels.

Practical: the lcd screen lets you customise each control channel with 2 characters. in addition, a signal appears when the battery level is low.

A transmitter for every use : choose either a wall version that can be placed where you want or a remote version that's always within easy reach!

The remote control: compact, ergonomic and practical, it fits easily in the hand and can also be hung up on the wall thanks to its magnetic bracket.


Elegant, both understated and modern, this new transmitter easily blends into any kind of decor. A collection of frames with stylish colours and decorations lets you to customise the wall transmitter and bring a unique touch to your decor.

You'll find this signature in the entire collection of SIMU-Hz transmitters.




SIMU-Hz
technology

PROGRAMMING AND ASSEMBLY

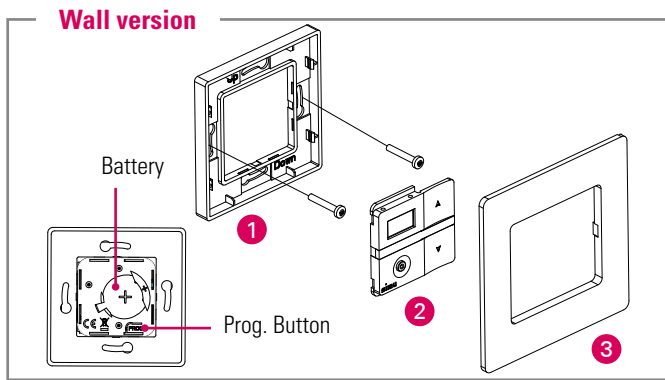


- 1 Mount the bracket on the wall
- 2 Clip on the Hz control module
- 3 Clip on the frame

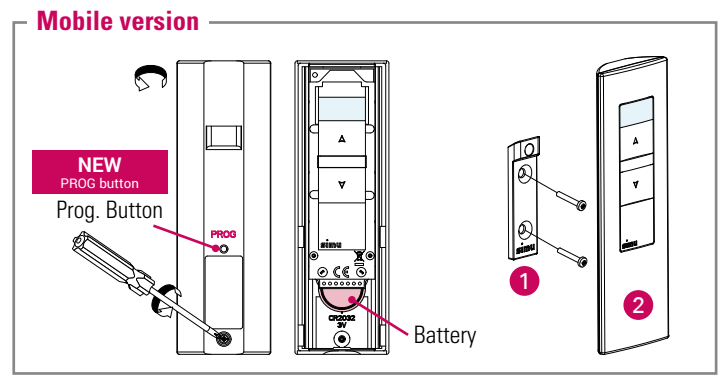

- 1 Mount the bracket on the wall
- 2 Put the Hz remote control in its wall bracket

TECHNICAL CHARACTERISTICS

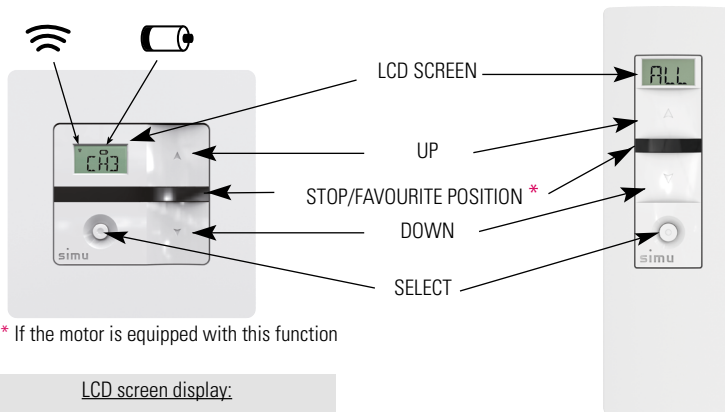

* If the motor is equipped with this function

LCD screen display:

CHB Channel in use

Signal indicator

Low battery indicator

Screen goes on standby after 2 minutes

POWER SUPPLY Wall version: Pile lithium 3V type CR 2430

Mobile version: Pile lithium 3V type CR 2032

RADIO RANGE - wall version: 150 meters in open field and 15 meters through 2 reinforced concrete walls
 - mobile version: 200 meters in open field and 20 meters through 2 reinforced concrete walls

SIZE - wall version: 80x80x10 mm
 - mobile version: 125x40x15 mm

RADIO FREQUENCY 433.42 MHz

OPERATING TEMPERATURE 0°C / +45°C

PROTECTION INDEX IP30

PRODUCT CLASS III

COMPATIBILITY SIMU-Hz motors and receivers



REFERENCES

DESCRIPTION	REFERENCE
WALL Hz TRANSMITTER - 5C	x1 2008335
MOBILE Hz REMOTE CONTROL - 5C	x1 2008798

COLLECTION OF COLOURED FRAMES TO CUSTOMIZE THE WALL TRANSMITTER

Anthracite	Taupe	Raspberry Red	Mineral Blue	Brushed Alu	Zebrano Wood	Lily flower	Zebra	Anthracite chrome	
Frames for wall transmitters	9019766	9019767	9019768	9019769	9019770	9019771	9019772	9019773	9019774

The frames are packaged individually

