



Committed to **you**

INDUSTRIAL CLOSURES

SIMUDRIVE CONTROL BOX SD510



A COMPLETE, EASY-TO-INSTALL CONTROL BOX FOR THREE-PHASE MOTORS

- **COMPREHENSIVE FUNCTIONS TO SECURE, SIMPLIFY AND PROTECT ACCESS POINTS**
 - 4 control modes (press-and-hold, mixed, impulse, automatic)
 - Compatible with the necessary safety accessories (4 sets of photocells, safety edge, flashing light)
 - Can be combined with numerous accessories (badge reader, clock, alarm, radio receiver)
- **EASY TO CONNECT** thanks to removable terminal blocks and dedicated inputs for each safety accessory
- **EASY TO PROGRAM**
 - 3 standard pre-set programs (according to the selected operating mode and the selected safety edge) make it easy to set up and use.
 - 2 levels of programming (level 1 and Expert) that allow you to personalise the system to suit your installation.
- **ADAPTED TO BOTH METAL CURTAINS AND GRILLES AND TO SECTIONAL DOORS**

TECHNICAL CHARACTERISTICS

LCD SCREEN

3 BUTTONS ON THE FRONT: UP - STOP - DOWN

POWER SUPPLY VOLTAGE: 230V 3~50/60Hz
380-415V 3N~50/60Hz

MAXIMUM MOTOR POWER: 1300 W

ACCESSORIES POWER SUPPLY: 24V DC / 0.5A

MAXIMUM CURRENT FOR ACCESSORIES: 250 mA / 230V AC (Excluding external loads using 230V AC)

PROTECTION RATING: IP54

DIMENSIONS: 262 x 193 x 100 mm

WEIGHT: 3,2 kg

REMOVABLE TERMINAL BLOCKS

REFERENCE

DESCRIPTION	REFERENCE
SIMUDRIVE SD510	2008779




NOTE

The red fault or maintenance indicator:

- Flashes to signal a fault.
- Lights up steadily to signal that maintenance is required.

INSTALLATION

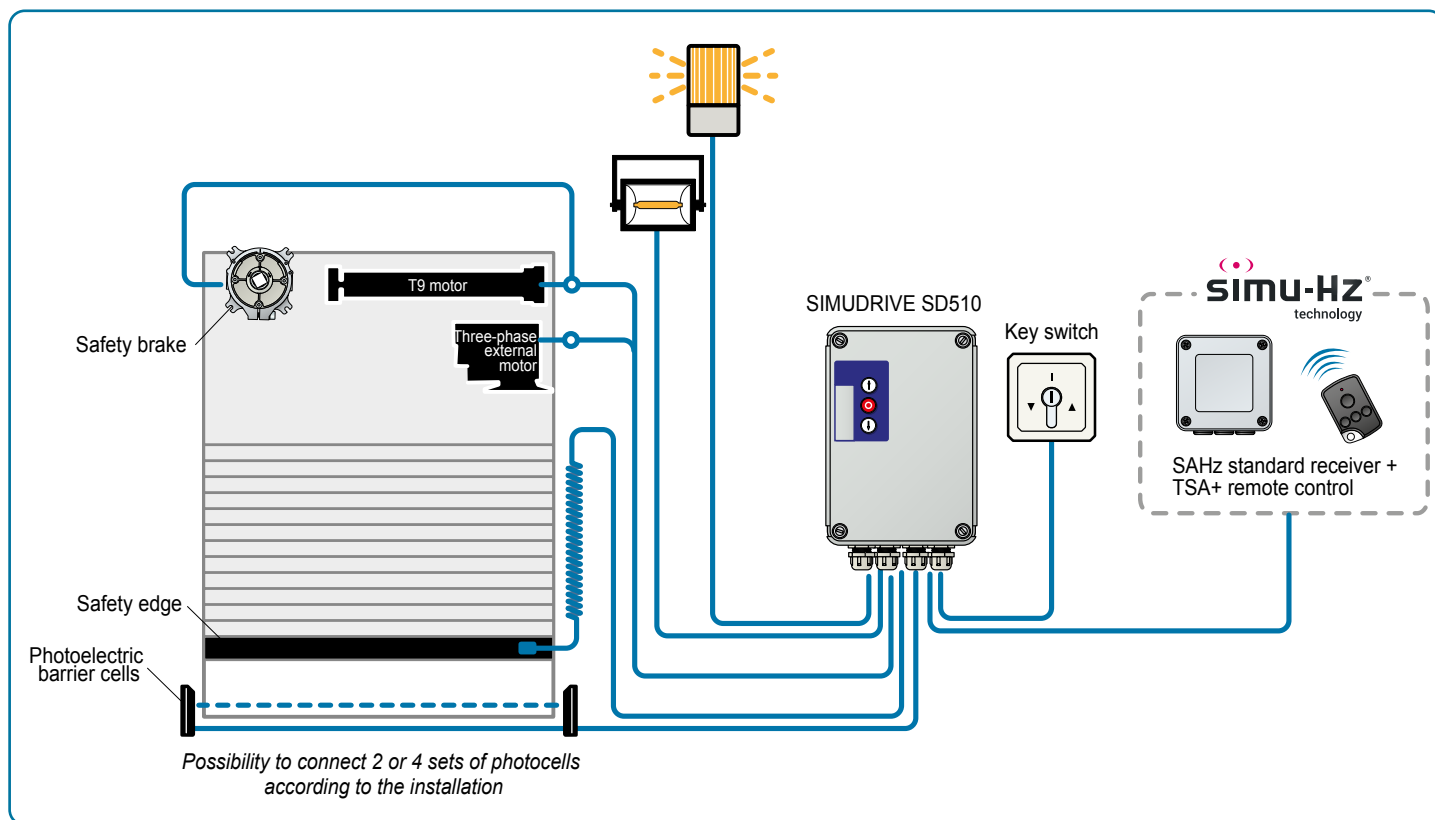

SIMU

ZONE INDUSTRIELLE LES GIRANAUX
70100 ARC-LÈS-GRAY
FRANCE

www.simu.com

